

ORDER # 4262875

ITEM # 12

SHIP WK:

SALES PERSON

TS

JOB NAME

WOOD CLAD COLOR

INTERIOR PRIME YES NO

CALLOUT

RADIUS RISE

PROFILE

DIRECT SET NO SASH A B

TRADITIONAL CONTEMPORARY

COLONIAL

INT. KERF YES NO

SIMULITE 5/8" 7/8" 1"

1 5/16" 1 1/4" 2"

TRADITIONAL CONTEMPORARY

PUTTY COLONIAL

GLASS

IG TEMP SG

LoE SPECIAL

LOCKRAIL 24 VENT TUBED

LITE PAT

PANEL TYPE

GLAZING BEAD

TRADITIONAL CONTEMPORARY

JAMB

4-1/8 4-9/16

6-1/8 6-9/16

6-1/16 OTHER

OPERATION

STAT OPER C

EXTERIOR CASING

BM STD SBM

OTHER

HARDWARE/SCREEN

COLOR

KEYED LOCKED


OTHER

DRAWING

VIEWED FROM

EXTERIOR

C. 10.3696-1

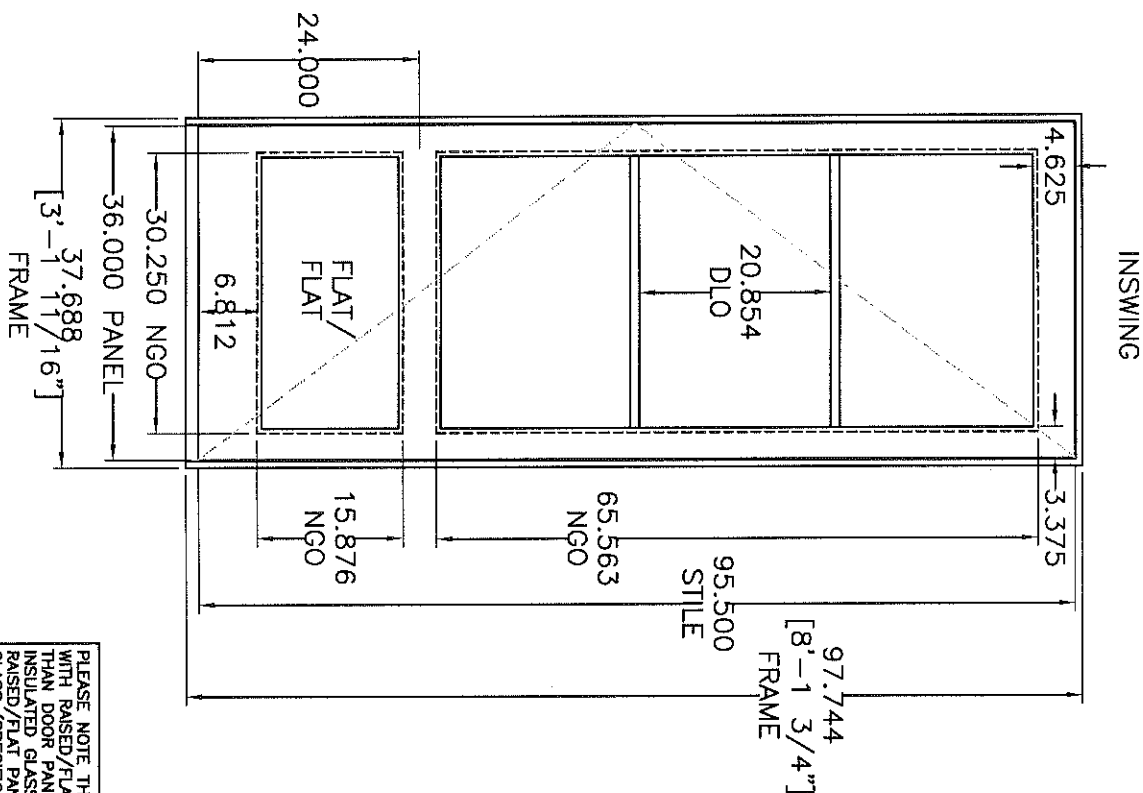

PLEASE NOTE THAT SWING DOOR PANELS MANUFACTURED WITH RAISED/FLAT PANELS WILL PERFORM DIFFERENTLY THAN DOOR PANELS MANUFACTURED STRICTLY WITH INSULATED GLASS. THE INSULATING PROPERTIES OF A RAISED/FLAT PANEL ARE LESS THAN THOSE OF INSULATED GLASS (SPECIFICALLY LOW E COATED GLASS) AND EXPOSURE TO COLD CLIMATES AND CERTAIN INTERIOR CONDITIONS MAY RESULT IN THE FORMATION OF CONDENSATION ON THE INSIDE OF THE DOOR PANEL.

A DIVISION OF SIERRA PACIFIC INDUSTRIES

CADD# CA-411392-77A

DATE: 02-18-20

DIMENSIONS NET OUTSIDE OF FRAME

LOCATION


SYMBOL

CUSTOMER SIGNATURE:

H	D
S	E
B	



1. <http://www.who.int/mediacentre/factsheets/fs104/en/>



2018

